

VP SERIES 1

IP66 Vapour Proof Linear

Product Description

The VP Series 1 is an IP66 Vapour Proof fitting with an aluminium housing, making it a perfect for industrial applications such as Production Halls and Car Parks.

Performance summary

Delivered Light Output: 5,400 - 8,100 lumens

Efficacy: Up to 135 lm/W

Input Power: 40 - 60W

IP Rating: IP66

CRI: >80

CCT: 4000K, 5000K


Input Voltage: 110-277V

Lifetime: 70,000 hours L80B50 at 25°C

Limited Warranty: 5 years

Dimensions: L 1200/1500mm x W 91mm x H 69mm

Mounting: Surface or suspended

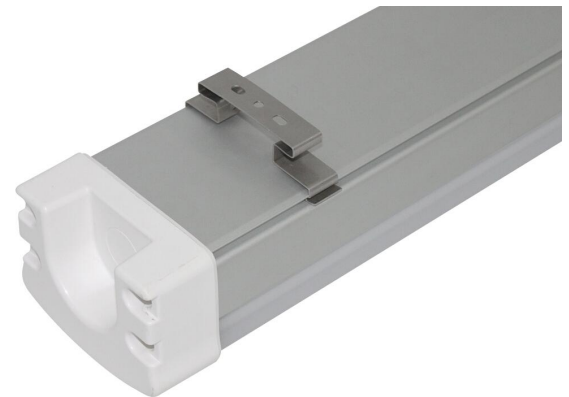

Ordering Information

Example: VP1-67L-50K-E3

Product	Lumen Output	CCT	Control (optional)	Emergency (optional)
VP1 VP Series 1	54L 40W, 5,400 lumens (1200mm)	40K Neutral white 4000K	DALI Touch + DALI	E3 Maintained emergency
	67L 50W, 6,750 lumens (1200mm)	50K Cool white 5000K	PIR PIR Sensor	ST Self-test emergency
	68L 50W, 6,750 lumens (1500mm)			AE DALI Addressable emergency
	81L 60W, 8,100 lumens (1500mm)			