




Key Features

- ▶ High output LED illuminated RMOD
- ▶ Homogenous output from twin opal light pipes
- ▶ Shallow twin triangular recessed body for vertical and horizontal illumination
- ▶ Robust polyester powder coated steel body with matt finish to minimise glare
- ▶ Available in 600 x 600 or 1200 x 600 mm
- ▶ Excellent efficacy to aid Part L compliance
- ▶ Tridonic LED and driver system
- ▶ Dimming options

Technical Drawing

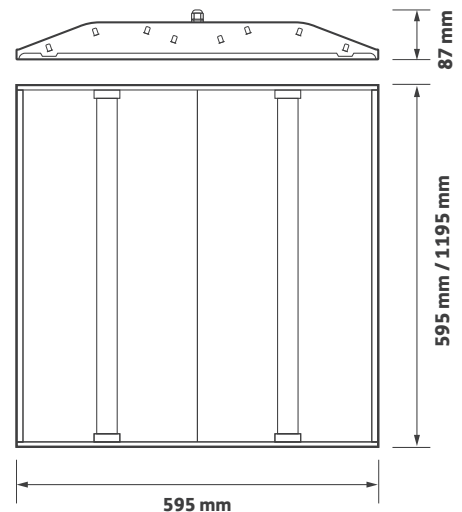

Ordering Information

Size	Module Output	Power	Colour	Model Ref.
600 x 600 mm	5500 lm	42 W	830	141.001
600 x 600 mm	5500 lm	42 W	840	141.002
600 x 600 mm	6200 lm	49 W	830	141.003
600 x 600 mm	6200 lm	49 W	840	141.004
1200 x 600 mm	11000 lm	81 W	830	141.005
1200 x 600 mm	11000 lm	81 W	840	141.006
1200 x 600 mm	12500 lm	96 W	830	141.007
1200 x 600 mm	12500 lm	96 W	840	141.008


Options

Please select from the options below.


SwitchDIM, DALI or DSI	/ECO
Single Point Connection to an ILEM product	/SPC




Options



/ECO
SwitchDIM, DALI or DSI



ILEM
Please see ILEM datasheet



/SPC
Single Point Connection to ILEM product